
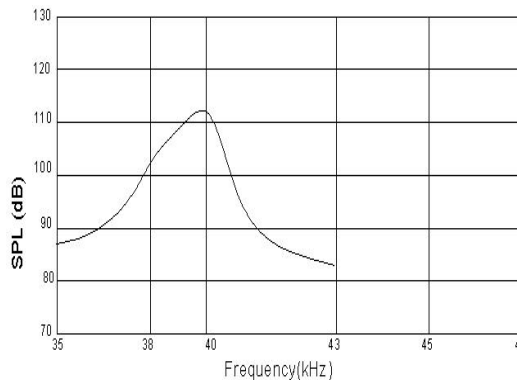



SPECIFICATION		
1	Model No.	EUS12T-40TR-WA
2	Construction	Open
3	Using method	Transmitter or receiver
4	Nominal Frequency(HZ)	40K
5	Sensitivity (dB)	≥103(10V/30cm/sine)
6	S P L(dB)	≥-70
7	Directivity	80deg
8	Capacitance(pF)	2000±25%@1KHz
9	Detectable range(M)	0.3...6
10	Operating Temperature(°C)	-20....+70
11	Housing material	Aluminum
12	Weight(g)	1.2

THIS DOCUMENT CONTAINS DATE  
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH  
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,  
 WITHOUT PRIOR WRITTEN PERMISSION OF  
 PROJECTS CHANGZHOU ESUNTECH CO LTD  
 IS PROHIBITED.  
 ©2003,Project Changzhou Esuntech Co Ltd

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

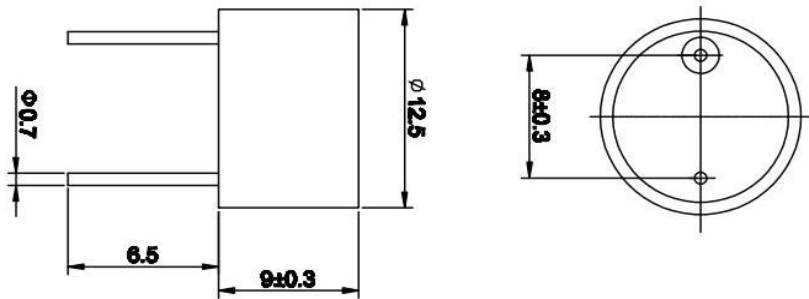


SPL-Frequency Characteristics

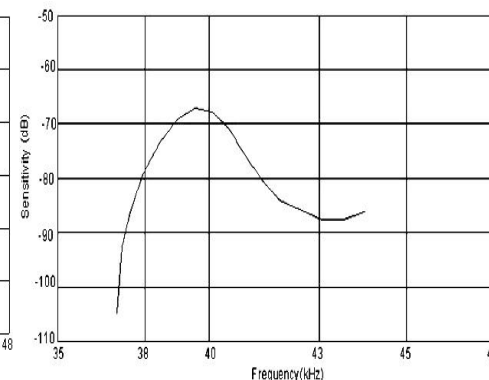

SPL-Frequency Characteristics

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	 <b>EST</b> Changzhou Esuntech Co.,Ltd <a href="http://www.esuntech.com.cn">http://www.esuntech.com.cn</a>						
EUS12T-40TR-WA							