

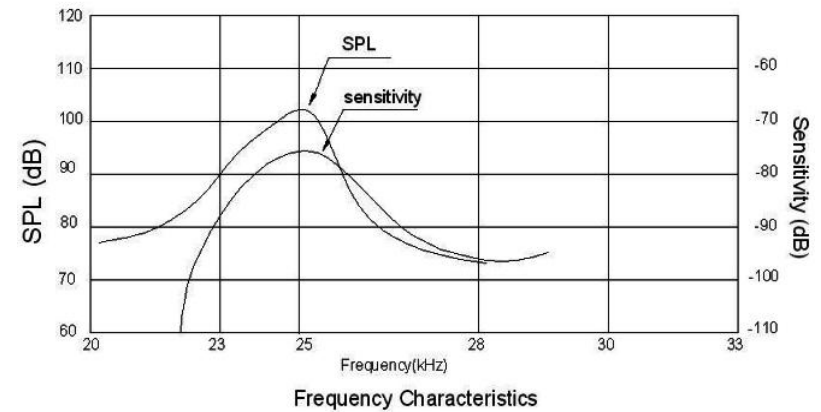


SPECIFICATION		
1	Model No.	EUS18F-40FS-BA
2	Construction	Water proof
3	Using method	dual
4	Normal Frequency	40kHz
5	SPL	100dB(effective Value 10V/
6	Sensitivity	min.-70dBV/u bar
7	Directivity	100 degrees
8	Capacitance	2200pF+/-25% at 1kHz
9	Detectable Range	0.2~4m
10	Housing material	aluminum or black)
11	Operating Temp.range	-30~+85 °C
12	Weight(g)	4


THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION, IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003, Project Changzhou Esuntech Co Ltd

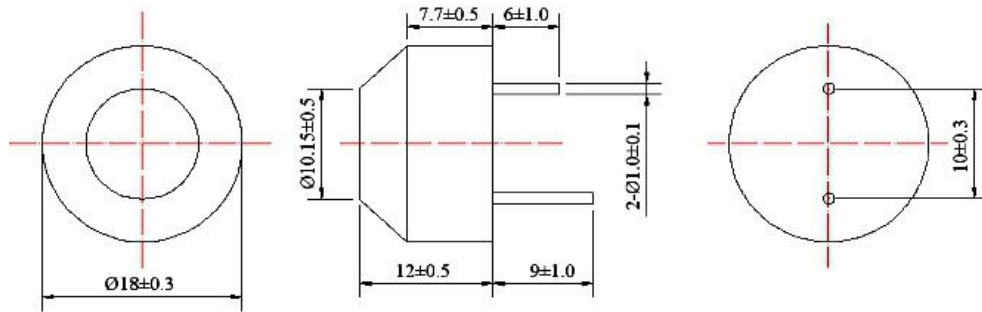

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

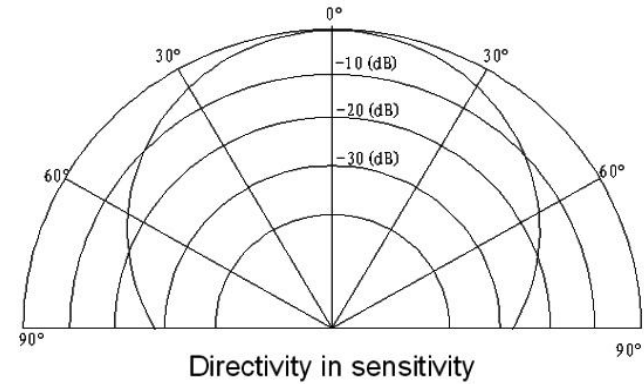

NOTES:
 1. ALL DIMENSIONS ARE IN MILLIMETERS
 2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	A4	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn			EUS18F-40FS-BA		
	Ultrasonic Sensor				Edition		