


SPECIFICATION		
1	Model No.	YD50-114-8N12.5M-R
2	Rated Power	0.5W
3	Max Power	1.0W
4	Impedance:	8Ω±15%Ω
5	Sound Level:	90±3dB at 0.1W/1M
6	F0:	300±20%
7	Response:	F0~10KHZ
8	Distortion:	<10% at 1KHZ,0.1W
9	Buzz,Rattle,Etc	2.0V must be normal at sine wave F0~5KHZ
10	Waterproof Rating	IP65
11	Magnet Size:	Φ28.5*11.5*5mm
12	Operation Temp.:	-20 ~ +60

THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003,Project Changzhou Esuntech Co Ltd





REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

Frequency Response:

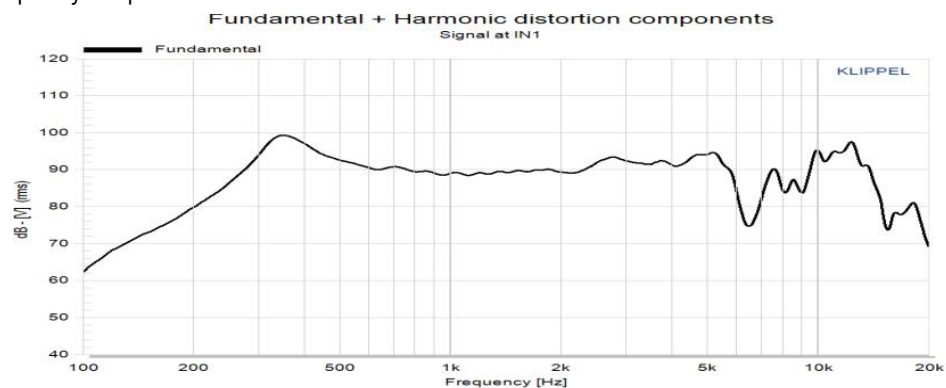

Total Harmonic Distortion Curve

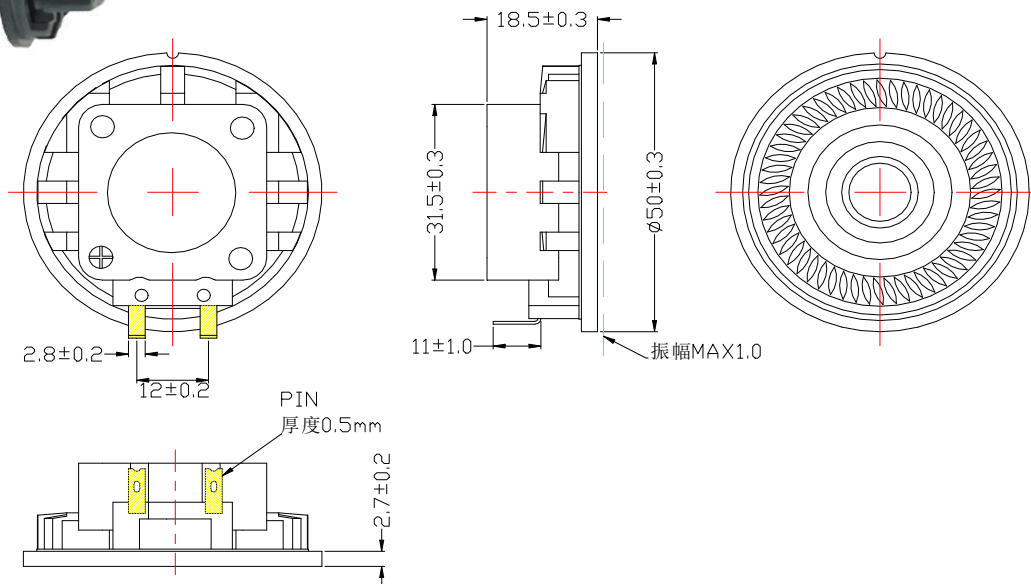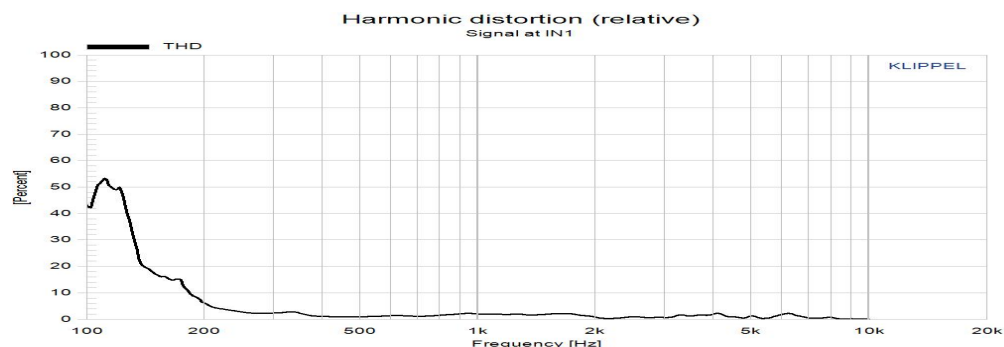

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE +/-0.5 AND ANGLES ARE +/-3°	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
								
	A4					YD50-114-8N12.5M-R		
		YD50-114-8N12.5M-R	Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn				Loudspeaker	